



soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1217



Release | Revision: B/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

### Page 1

Speaker Electroacoustic Characteristics

General Specifications

### Page 2

Reliability Tests

### Page 3

Measuring Method (Speaker Mode)

Standard Test Condition of Speakers

### Page 4

Frequency Response Curve

### Page 5

Dimensions

### Page 6

Packing

## Dynamic Speaker Electroacoustic Characteristics

### Sound Pressure Level

85±3dB SPL @0.1 Watt, 10cm  
Average at 0.8, 1.0, 1.2 & 1.5KHz

Measuring Condition: 0.1 W (Sine wave) 10cm measured with baffler, as shown in Figure 1

### Frequency Response Curve

As shown in Figure 2

### Frequency Range

F0 ~ 20.0KHz

### Response Frequency

1100±20%Hz at 1.0V

### Input Power (Nominal and Maximum)

Rated Noise Power: 0.8 Watt

Short Term Max Power: 1.0 Watt

### Operation Test

Result must be normal when tested at 2.53 Volts in free air

### Total Harmonic Distortion

10% Max @2.0KHz, 0.1 Watt, 0.1 Meter

### Polarity

Diaphragm shall move forward when a positive DC current is applied to the "+" or 'marked' Terminal.

## General Specifications

### Operating Temperature Range

-20°C ~ +60°C

### Storage Temperature Range

-30°C ~ +70°C

### Standard Test Conditions

Temperature 15°C ~ 35°C

Relative Humidity 45% ~ 85% (RH)

### Voice Coil Impedance

DC: 8±15%Ω

### Dimension

12.0 x 17.0 x H3.4mm  
Wire: 25mm (UL1571 / AWG32#)

### IP Level

No Rating



soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1217



Release | Revision: B/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

**Page 1**  
Speaker Electroacoustic Characteristics

General Specifications

**Page 2**  
Reliability Tests

**Page 3**  
Measuring Method (Speaker Mode)

Standard Test Condition of Speakers

**Page 4**  
Frequency Response Curve

**Page 5**  
Dimensions

**Page 6**  
Packing

## Reliability Tests

The sound pressure as specified shall neither deviate more than  $\pm 3\text{dB}$  from the initial value, nor have any significant damage after any of following testing.

### High Temperature Test

High Temperature  $+70\pm 2^\circ\text{C}$   
Duration 96 hours

### Low Temperature Test

Low Temperature  $-30\pm 2^\circ\text{C}$   
Duration 96 hours

### Heat Shock Test

High Temperature  $+70\pm 2^\circ\text{C}$   
Low Temperature  $-30\pm 2^\circ\text{C}$   
Changeover Time  $< 30$  seconds  
Duration 1 hour  
Number of Cycles 100

### Humidity Test

Temperature  $+40\pm 2^\circ\text{C}$   
Relative Humidity 90% ~ 95%  
Duration 96 hours

### Temperature Cycle Test

Temperature  $-30^\circ\text{C}$   $+70^\circ\text{C}$   
Duration 45 minutes 45 minutes  
Temperature gradient  $1 \sim 3^\circ\text{C}/\text{min}$   
Number of Cycles 25

### Drop Test

The speaker is mounted onto the dummy assembly, placed in a standard cardboard box and then dropped onto a concrete board.

Height 0.75 m  
Number of Cycles 6

### Load Test

Speaker mode: White noise (EIA filter) for 96 hours @0.8W input power



soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1217



Release | Revision: B/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

**Page 1**  
Speaker Electroacoustic Characteristics

General Specifications

**Page 2**  
Reliability Tests

**Page 3**  
Measuring Method (Speaker Mode)

Standard Test Condition of Speakers

**Page 4**  
Frequency Response Curve

**Page 5**  
Dimensions

**Page 6**  
Packing

## Measuring Method (Speaker Mode)

### Standard Test Condition

Temperature 15 ~ 35°C

Relative humidity 45% ~ 85%

Atmospheric pressure 860mbar ~ 1060mbar

### Standard Test Fixture

Input Power 0.8W / 2.53V


Zero Level -dB

Mode TSR

Potentiometer Range 50dB

Sweep Time 0.5sec

## Standard Test Condition of Speaker (Fig. 1)

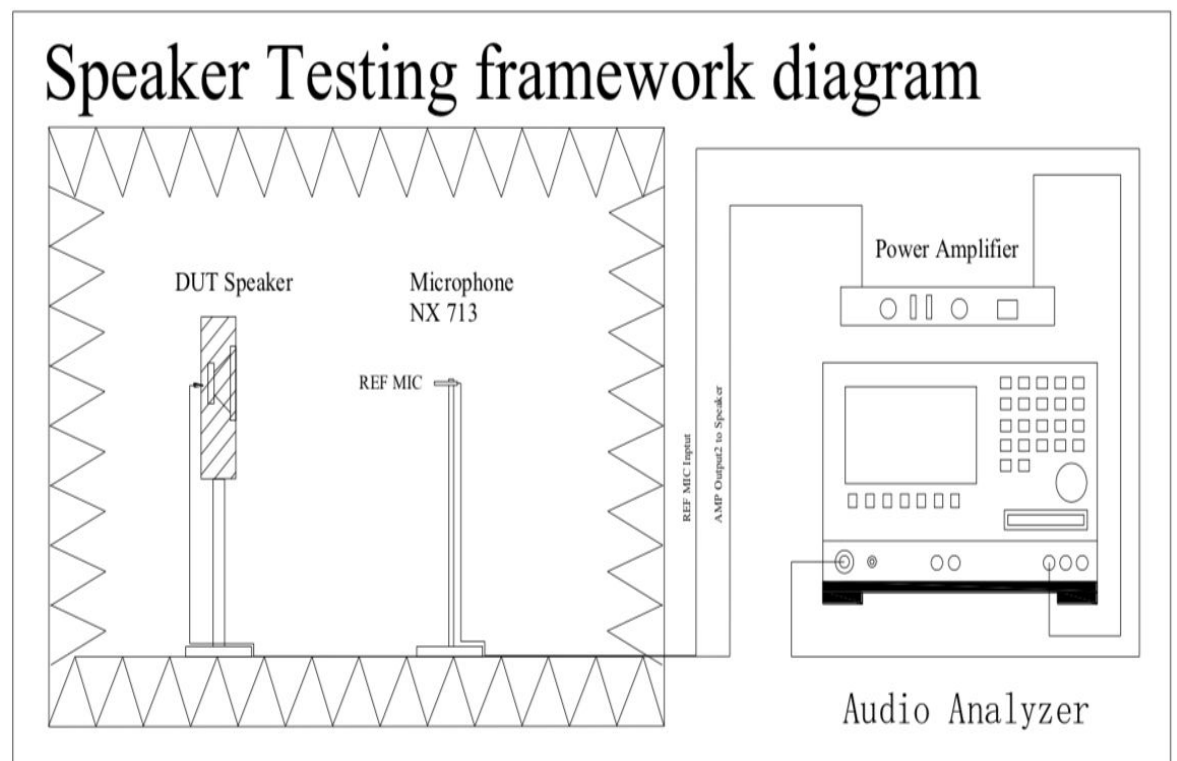



soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1217



Release | Revision: B/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

**Page 1**  
Speaker Electroacoustic Characteristics

General Specifications

**Page 2**  
Reliability Tests

**Page 3**  
Measuring Method (Speaker Mode)

Standard Test Condition of Speakers


**Page 4**  
Frequency Response Curve

**Page 5**  
Dimensions

**Page 6**  
Packing

## Frequency Response Curve (Fig. 2)

Test Condition: 0.1W /0.1M

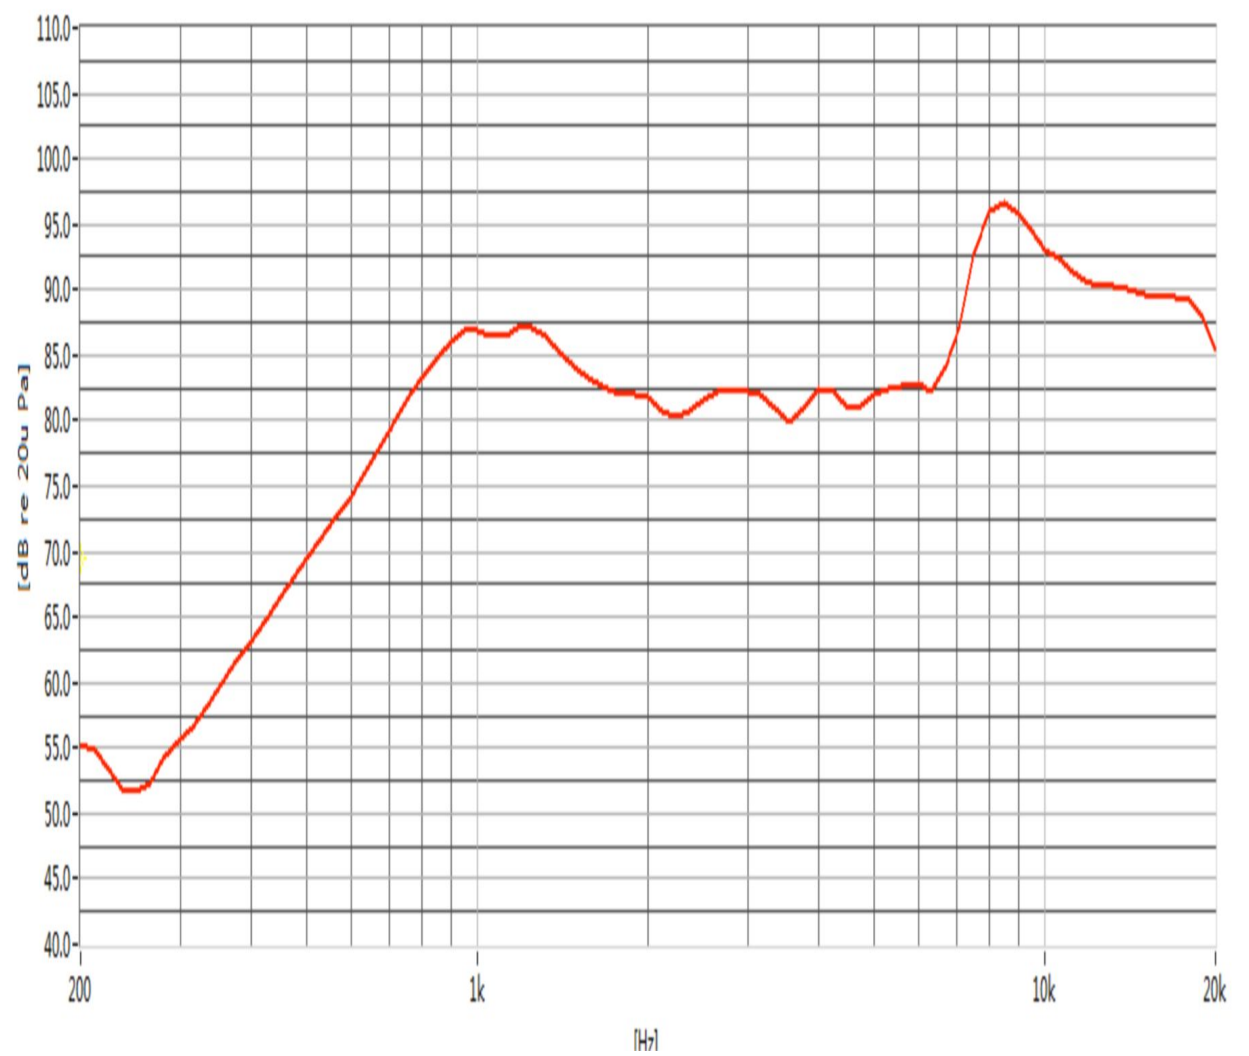



soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1217



Release | Revision: B/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

**Page 1**  
Speaker Electroacoustic Characteristics

General Specifications

**Page 2**  
Reliability Tests

**Page 3**  
Measuring Method (Speaker Mode)

Standard Test Condition of Speakers


**Page 4**  
Frequency Response Curve

**Page 5**  
Dimensions

**Page 6**  
Packing

## Dimensions

Tolerance:  $\pm 0.2$  (unit: mm)

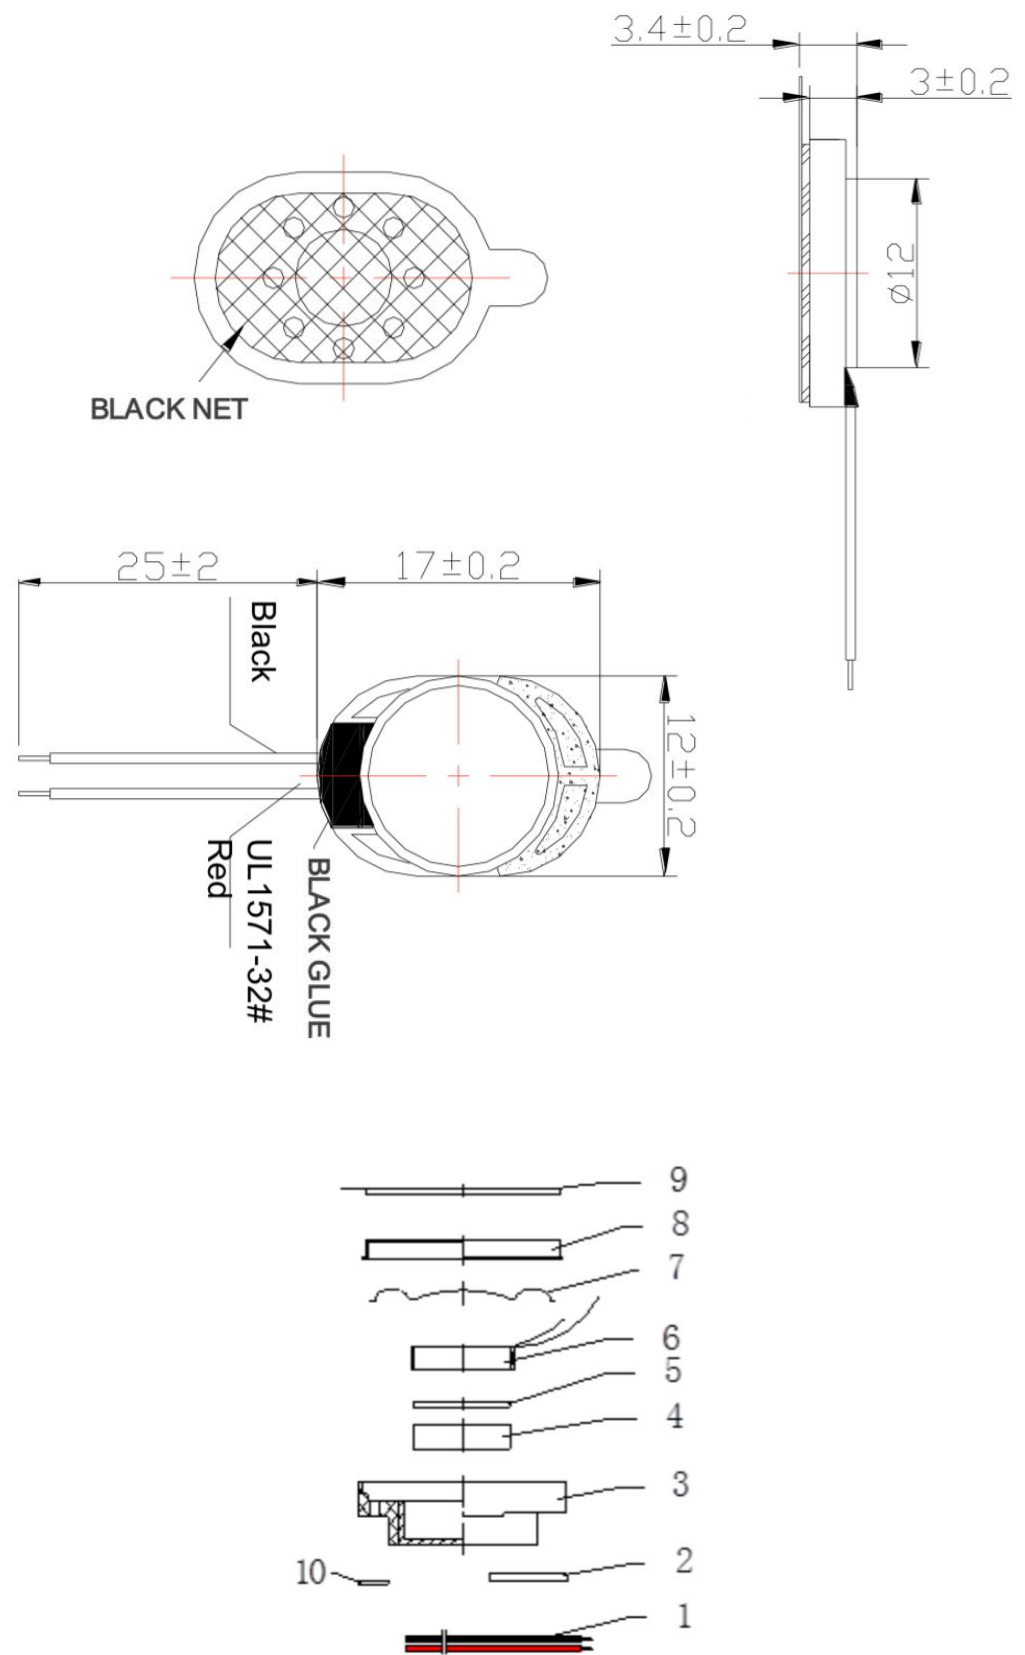

| No. | Part Name    | Material        | Quantity |
|-----|--------------|-----------------|----------|
| 1   | WIRE ( 25mm) | UL1571 / AWG32# | 2        |
| 2   | PCB          | FR-4            | 1        |
| 3   | Frame        | PBT             | 1        |
| 4   | Magnet       | Nd Fe B - N38   | 1        |
| 5   | Plate        | SPCC            | 1        |
| 6   | Voice Coil   | Copper          | 1        |
| 7   | Membrane     | PET             | 1        |
| 8   | Cap          | SUS 303         | 1        |
| 9   | Gasket       | Black Net       | 1        |
| 10  | Screen       | Black Cloth     | 1        |



soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-1217



Release | Revision: B/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

### Page 1

Speaker Electroacoustic Characteristics

General Specifications

### Page 2

Reliability Tests

### Page 3

Measuring Method (Speaker Mode)

Standard Test Condition of Speakers

### Page 4

Frequency Response Curve


### Page 5

Dimensions

### Page 6

Packing

## Packing

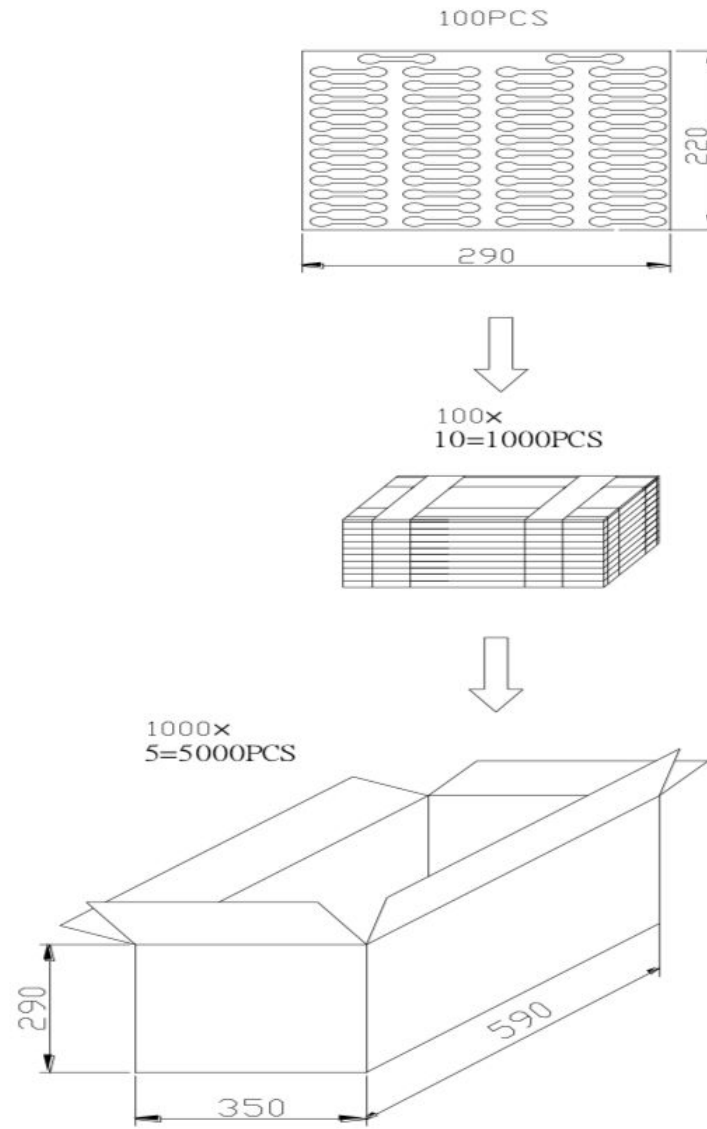

## Remarks

Per Tray: 100 pcs  
 Per Box : 1,000 pcs  
 Per Carton: 5,000 pcs  
 Carton Size: 590 x 350 x 290mm