




soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-2014L-2

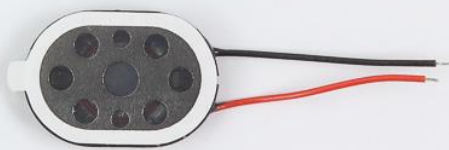

Release | Revision: C/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

### Page 1

Speaker Electroacoustic Characteristics

General Specifications

### Page 2

Reliability Tests

### Page 3

Measuring Method (Speaker Mode)

Standard Test Condition of Speakers

### Page 4

Frequency Response Curve

### Page 5

Dimensions

### Page 6

Packing

## Dynamic Speaker Electroacoustic Characteristics

### Sound Pressure Level

90±3dB SPL @0.8 Watt, 10cm  
Average at 2.0KHz

Measuring Condition: 0.8W (Sine wave) 10cm measured with baffler, as shown in Figure 1

### Frequency Response Curve

As shown in Figure 2

### Frequency Range

F0 ~ 20.0KHz

### Response Frequency

950±20%Hz at 1.0V

### Input Power (Nominal and Maximum)

Rated Noise Power: 0.8 Watt

Short Term Max Power: 1.0 Watt

### Operation Test

Result must be normal when tested at 2.53 Volts in free air

### Total Harmonic Distortion

Less than 10%@2.0KHz, 0.8 Watt

### Polarity

Diaphragm shall move forward when a positive DC current is applied to the “+” or ‘marked’ Terminal.

## General Specifications

### Operating Temperature Range

-30°C ~ +60°C

### Storage Temperature Range

-40°C ~ +85°C

### Standard Test Conditions

Temperature 15°C ~ 35°C

Relative Humidity 45% ~ 85% (RH)

### Impedance

DC: 8±15%Ω

### Dimension

20.0 x 14.0 x H4.1mm  
Wire 23mm ( UL1571/ AWG30#)

### IP Level

No Rating




soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-2014L-2

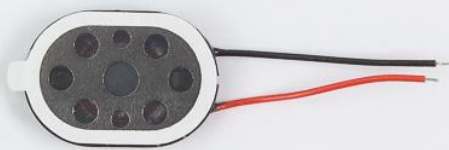

Release | Revision: C/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

**Page 1**  
Speaker Electroacoustic Characteristics

General Specifications

**Page 2**  
Reliability Tests

**Page 3**  
Measuring Method (Speaker Mode)

Standard Test Condition of Speakers

**Page 4**  
Frequency Response Curve

**Page 5**  
Dimensions

**Page 6**  
Packing

## Reliability Tests

The sound pressure as specified shall neither deviate more than  $\pm 3\text{dB}$  from the initial value, nor have any significant damage after any of following testing.

### High Temperature Test

High Temperature  $+85\pm 2^\circ\text{C}$   
Duration 96 hours

### Low Temperature Test

Low Temperature  $-40\pm 2^\circ\text{C}$   
Duration 96 hours

### Heat Shock Test

High Temperature  $+85\pm 2^\circ\text{C}$   
Low Temperature  $-40\pm 2^\circ\text{C}$   
Changeover Time  $< 30$  seconds  
Duration 1 hour  
Number of Cycles 10

### Humidity Test

Temperature  $+40\pm 2^\circ\text{C}$   
Relative Humidity 90% ~ 95%  
Duration 48 hours

### Temperature Cycle Test

Temperature  $-40^\circ\text{C}$   $+85^\circ\text{C}$   
Duration 45 minutes 45 minutes  
Temperature gradient  $1 \sim 3^\circ\text{C}/\text{min}$   
Number of Cycles 25

### Drop Test

The speaker is mounted onto the dummy assembly, placed in a standard cardboard box and then dropped onto a concrete board.

Height 0.75 m  
Number of Cycles 6

### Load Test

Speaker mode: White noise (EIA filter) for 96 hours @0.8W input power



soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-2014L-2



Release | Revision: C/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

**Page 1**  
Speaker Electroacoustic Characteristics

General Specifications

**Page 2**  
Reliability Tests

**Page 3**  
Measuring Method (Speaker Mode)

Standard Test Condition of Speakers

**Page 4**  
Frequency Response Curve

**Page 5**  
Dimensions

**Page 6**  
Packing

## Measuring Method (Speaker Mode)

### Standard Test Condition

Temperature 15 ~ 35°C

Relative humidity 45% ~ 85%

Atmospheric pressure 860mbar ~ 1060mbar

### Standard Test Fixture

Input Power 0.8W / 2.53V


Zero Level -dB

Mode TSR

Potentiometer Range 50dB

Sweep Time 0.5sec

## Standard Test Condition of Speaker (Fig. 1)

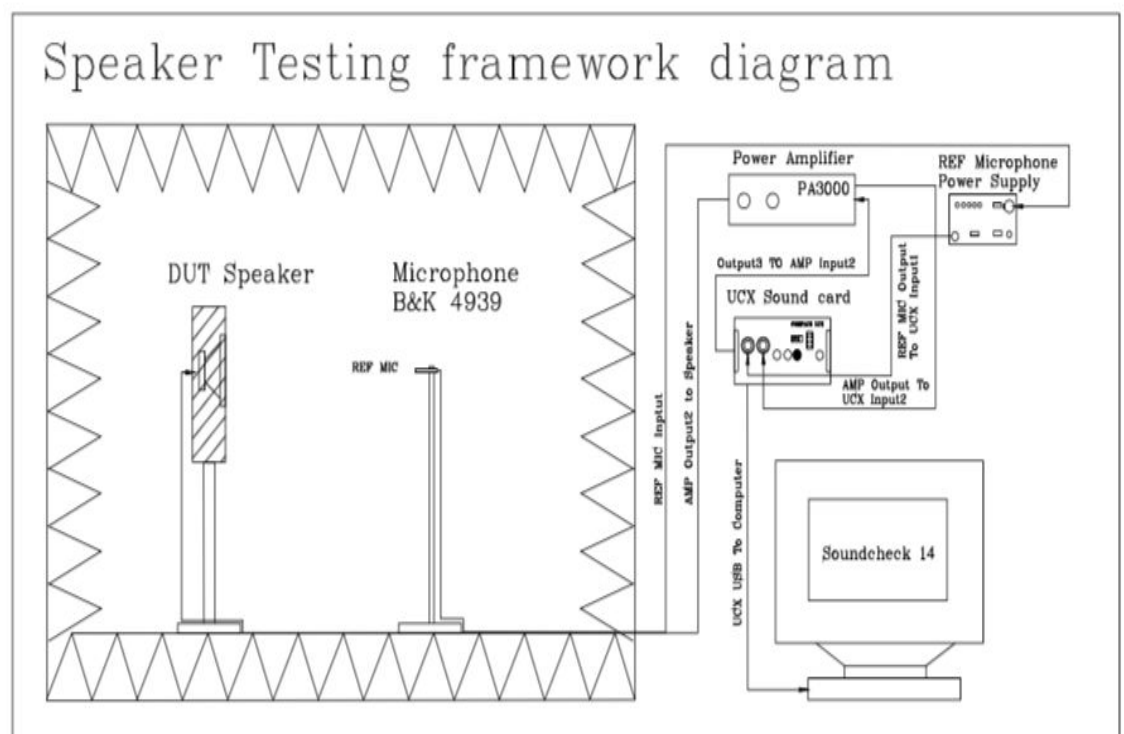




soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-2014L-2

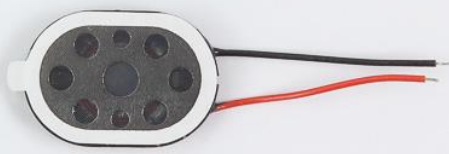

Release | Revision: C/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

**Page 1**  
Speaker Electroacoustic Characteristics

General Specifications

**Page 2**  
Reliability Tests

**Page 3**  
Measuring Method (Speaker Mode)

Standard Test Condition of Speakers


**Page 4**  
Frequency Response Curve

**Page 5**  
Dimensions

**Page 6**  
Packing

## Frequency Response Curve (Fig. 2)

Test Condition: 0.8W /0.1M

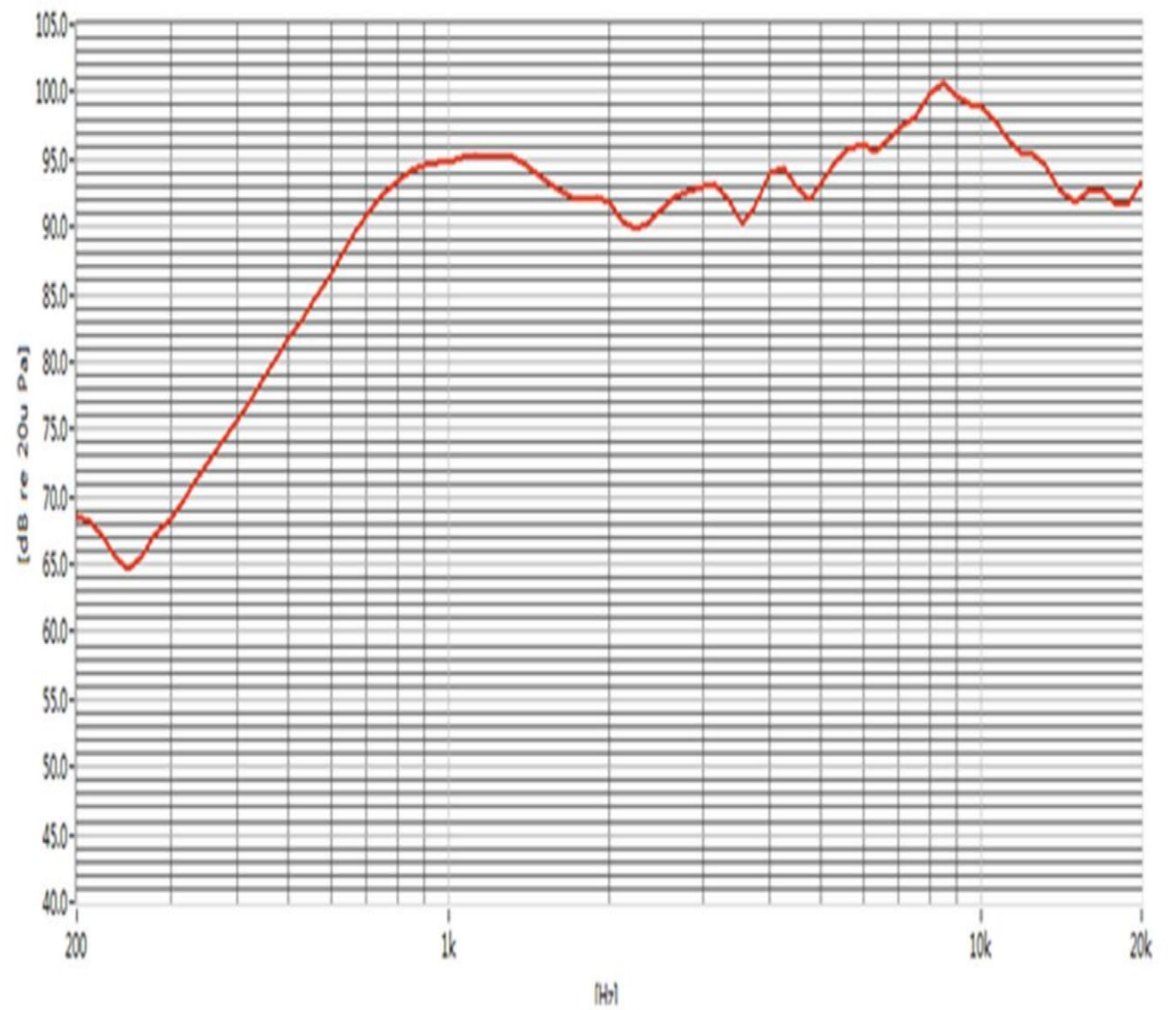




soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-2014L-2

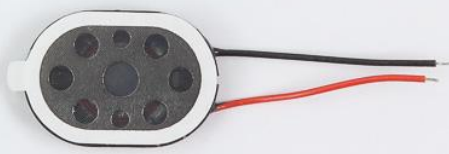

Release | Revision: C/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

### Page 1

Speaker Electroacoustic Characteristics

General Specifications

### Page 2

Reliability Tests

### Page 3

Measuring Method (Speaker Mode)

Standard Test Condition of Speakers

### Page 4

Frequency Response Curve

### Page 5


Dimensions

### Page 6

Packing

## Dimensions

Tolerance:  $\pm 0.5$  (unit: mm)

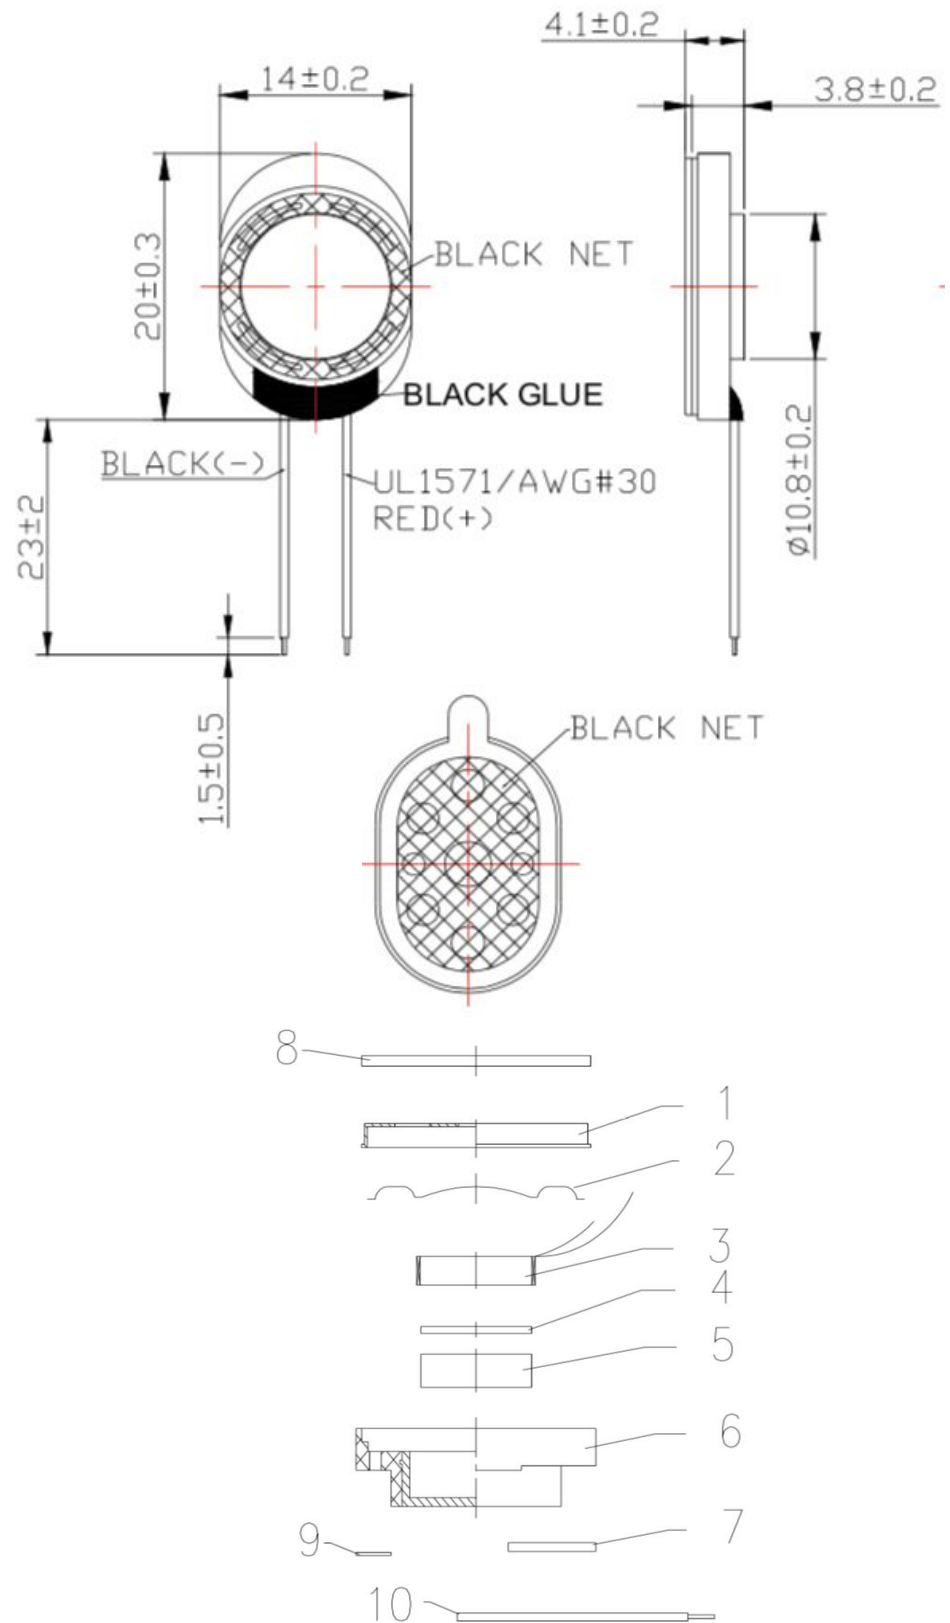

No.	Part Name	Material	Quantity
1	Cap	SUS	1
2	Diaphragm	PEN	1
3	Voice Coil	Cu	1
4	Plate 1	SPCC	1
5	Main Magnet	Nd Fe B	1
6	Frame	PBT + SPCC	1
7	PCB	FR-4	1
8	Dustproof Net	Black Net	1
9	Silk Screen	Black Net	1
10	WIRE (23mm)	UL1571 / AWG30#	2




soberton inc.

# SP DYNAMIC SPEAKER UNIT

Acoustic Product Specification

Product Number: SP-2014L-2

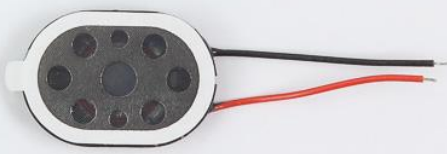

Release | Revision: C/2021

## CONTENTS

This document contains the technical specifications for the dynamic speaker unit.

**Page 1**  
Speaker Electroacoustic Characteristics

General Specifications

**Page 2**  
Reliability Tests

**Page 3**  
Measuring Method (Speaker Mode)


Standard Test Condition of Speakers

**Page 4**  
Frequency Response Curve

**Page 5**  
Dimensions

**Page 6**  
Packing

## Packing

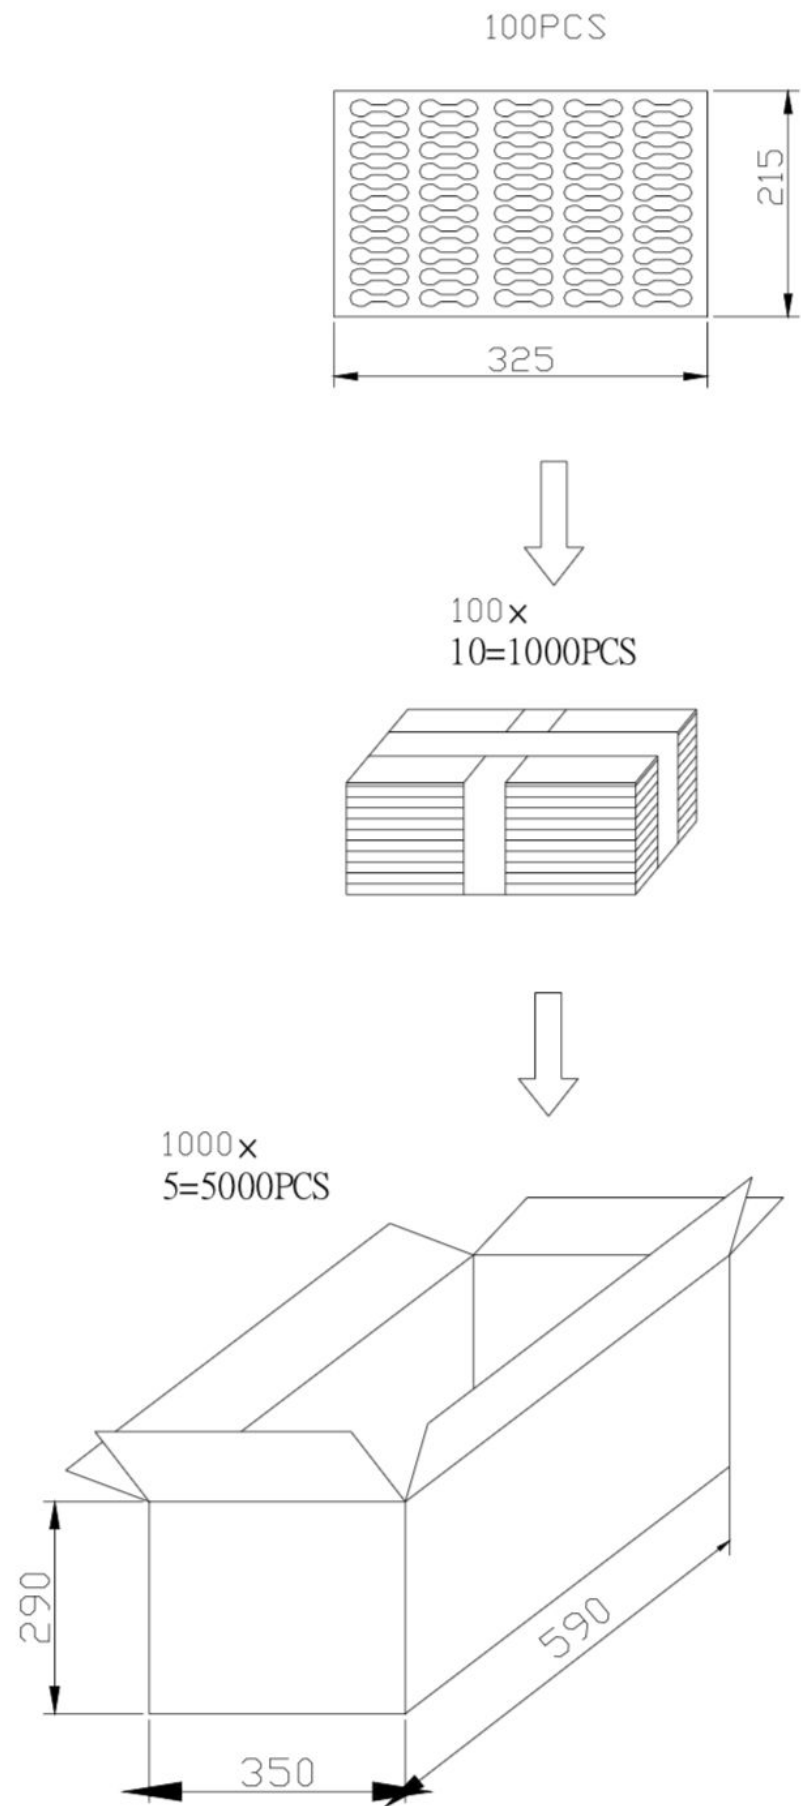

## Remarks

- Per Tray: 100 pcs
- Per Box: 1,000 pcs
- Per Carton: 5 boxes
- Per Carton: 5,000 pcs
- Carton Size: 350 x 590 x 290mm